



# INSTALLATION MANUAL

# KARIZMA<sup>l</sup>uce



Arte



RoHS


10W MAX | AC220-240V | 50/60Hz | IP20

Die cast | Adjustable




Do not operate with power supply connected.

1

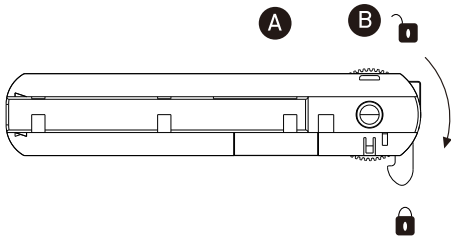


To mount the track adaptor into the track system, first check that the selector knob **A** is at OFF position and the adaptor lock **B** is disengaged.

2




When installing the adaptor into the track, ensure that it is orientated correctly.

3




Rotate adaptor lock **B** clockwise 90° to connect the adaptor to the neutral circuit.

4

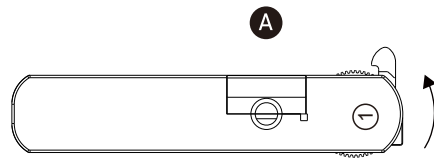


Rotate selector knob **A** to the position of desired circuit.

4a

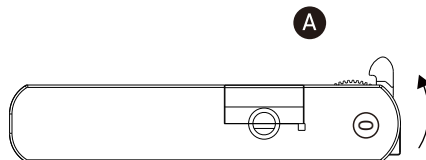


Circuit 1: Rotate the knob **A** 45° clockwise from the starting point OFF, to connect circuit 1.

4b

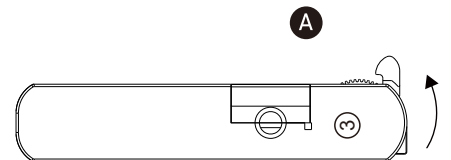


Circuit 2: Rotate the knob **A** 90° anti-clockwise from the starting point OFF, to connect circuit 2.

4a

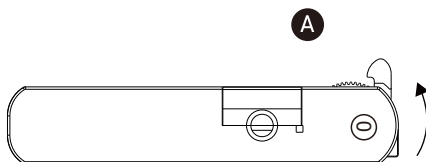


Circuit 1: Rotate the knob **A** 135° clockwise from the starting point OFF, to connect circuit 3.

4c

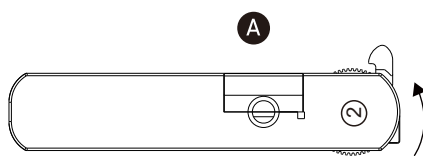

Circuit 3: Rotate the knob **A** 180° clockwise from the starting point OFF, to connect circuit 4.

5



## Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.